

«N» and «NOX»

Machine Mounts from ROSTA

- Machines
- Apparatus
- Installations ...

... only work as well,
as they stand!

N 70/120:

- shock absorbing
- anti-slip
- corrosion-resistant
- with levelling system


NOX 70/120:

- food safe
- corrosion-resistant (1.4301/1.4305)
- antibacterial

Both machine mount types are equipped
with swivel-articulations for the
compensation of ground unevenness




ROSTA





Anti-vibration mounting

Type **N 70/120**
Type **NOX 70/120**

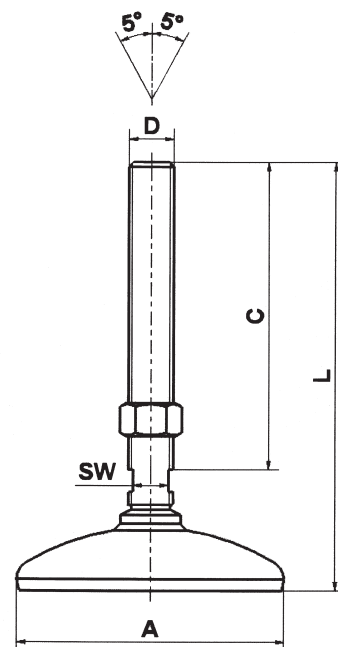

Art. No.	Type	Material Shaft	Material Socket	Load in daN (kg) max.	Natural frequency in Hz	Dimensions in mm					
						A	C	D	L	SW	
05 058 001	N 70/71	M12x100	galvanized	galvanized and painted	0–600	22–25	80	55	M 12	100	10
05 058 002	N 70/71	M16x182	galvanized	galvanized and painted	500–1200	19–22	80	136	M 16	182	13
05 058 004	N 120/121	M20x195	galvanized	galvanized and painted	1000–2000	19–22	120	139	M 20	195	16
05 058 102	NOX 70	M16x182	INOX 1.4305	INOX 1.4301	500–1200	19–22	80	136	M 16	182	13
05 058 103	NOX 120	M20x195	INOX 1.4305	INOX 1.4301	1000–2000	19–22	120	139	M 20	195	16

Applications:

For damping vibrations and solid-borne noise transmission in machinery and apparatus also requiring levelling, such as: air conditioning plants, woodworking machinery, pumps, tanks, containers, transport systems, light tooling machines, assembly lines and workshop equipment.



ROSTA



ROSTA AG
CH - 5502 Hunzenschwil
Phone +41 62 897 24 21
Fax +41 62 897 15 10
E-Mail info@rosta.ch
Internet www.rosta.ch